


PIVOT BOOM JIB LIFT

SINGLE HOOK CAPACITIES

| Hook Pos. | Hook Position (inches) | 4000 LB. CAPACITY LIFT JIB | | | | | | | 6000 LB. CAPACITY LIFT JIB | | | | 8000 LB. CAPACITY LIFT JIB | | | |
|-----------|------------------------|--|------|------|------|------|--------|---------------|--|--------|--------|---------------|--|--------|--------|---------------|
| | | Forklift Truck Capacity at 24" Load Center | | | | | | MAX. JIB CAP. | Forklift Truck Capacity at 24" Load Center | | | MAX. JIB CAP. | Forklift Truck Capacity at 24" Load Center | | | MAX. JIB CAP. |
| | | 2000 | 4000 | 5000 | 6000 | 8000 | 10,000 | | 10,000 | 12,000 | 14,000 | | 16,000 | 18,000 | 20,000 | |
| 1 | 80 | 595 | 1429 | 1845 | 2262 | 3095 | 3929 | 4000 | 3828 | 4662 | 5495 | 6000 | 6087 | 6920 | 7754 | 8000 |
| 2 | 87-1/2 | 545 | 1318 | 1704 | 2091 | 2864 | 3535 | 3535 | 3540 | 4313 | 5086 | 5302 | 5633 | 6406 | 6974 | 6974 |
| 3 | 95 | 501 | 1222 | 1582 | 1943 | 2663 | 3167 | 3167 | 3291 | 4012 | 4733 | 4750 | 5240 | 5961 | 6182 | 6182 |
| 4 | 102-1/2 | 463 | 1138 | 1476 | 1813 | 2488 | 2868 | 2868 | 3074 | 3749 | 4302 | 4302 | 4897 | 5551 | 5551 | 5551 |
| 5 | 110 | 429 | 1064 | 1382 | 1699 | 2334 | 2621 | 2621 | 2882 | 3517 | 3931 | 3931 | 4594 | 5037 | 5037 | 5037 |
| 6 | 117-1/2 | 399 | 999 | 1298 | 1598 | 2197 | 2413 | 2413 | 2712 | 3311 | 3619 | 3619 | 4326 | 4610 | 4610 | 4610 |
| 7 | 125 | 373 | 940 | 1224 | 1507 | 2075 | 2235 | 2235 | 2560 | 3127 | 3353 | 3353 | 4086 | 4250 | 4250 | 4250 |
| 8 | 132-1/2 | 349 | 887 | 1157 | 1426 | 1965 | 2082 | 2082 | 2423 | 2962 | 3123 | 3123 | 3871 | 3942 | 3942 | 3942 |
| 9 | 140 | 327 | 840 | 1096 | 1353 | 1865 | 1949 | 1949 | 2300 | 2813 | 2923 | 2923 | 3676 | 3676 | 3676 | 3676 |

JIB LIFT CAPACITIES DEPEND COMPLETELY ON CAPACITY OF FORK LIFT BEING USED.


SINGLE HOOK CAPACITIES ARE BASED ON A FORKLIFT TRUCK WITH DIMENSIONS SHOWN BELOW

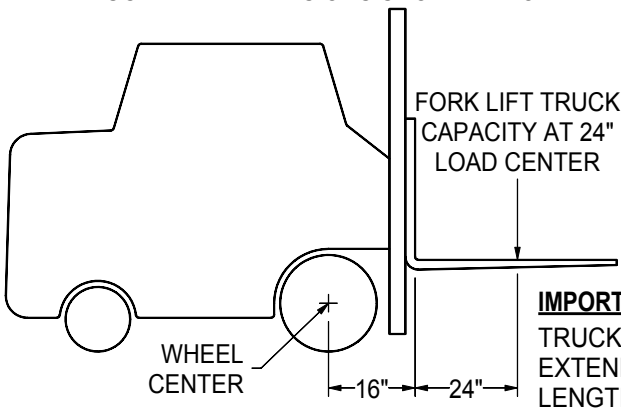

IMPORTANT
TRUCK FORKS MUST EXTEND THROUGH FULL LENGTH OF MOUNTING TUBES

CHECK WITH MANUFACTURER OF YOUR FORKLIFT FOR LOAD CAPABILITIES BEFORE USING

| MAX. CAP. (LBS) | MODEL NUMBER | DIM. "S" | DIM. "W" | DIM. "TL" | DIM. "H.U.B." | WT. (LBS) |
|-----------------|--------------|----------|----------|-----------|---------------|-----------|
| 4000 | PB-JLT424 | 24" | 30" | 24" | 18-1/2" | 491 |
| 4000 | PB-JLT436 | 36" | 44" | 24" | 19-1/2" | 588 |
| 6000 | PB-JLT624 | 24" | 32" | 24" | 19-1/2" | 640 |
| 6000 | PB-JLT636 | 36" | 44" | 24" | 23-1/2" | 718 |
| 8000 | PB-JLT836 | 36" | 44" | 32" | 27-1/2" | 933 |
| 8000 | PB-JLT848 | 48" | 56" | 32" | 27-1/2" | 1025 |

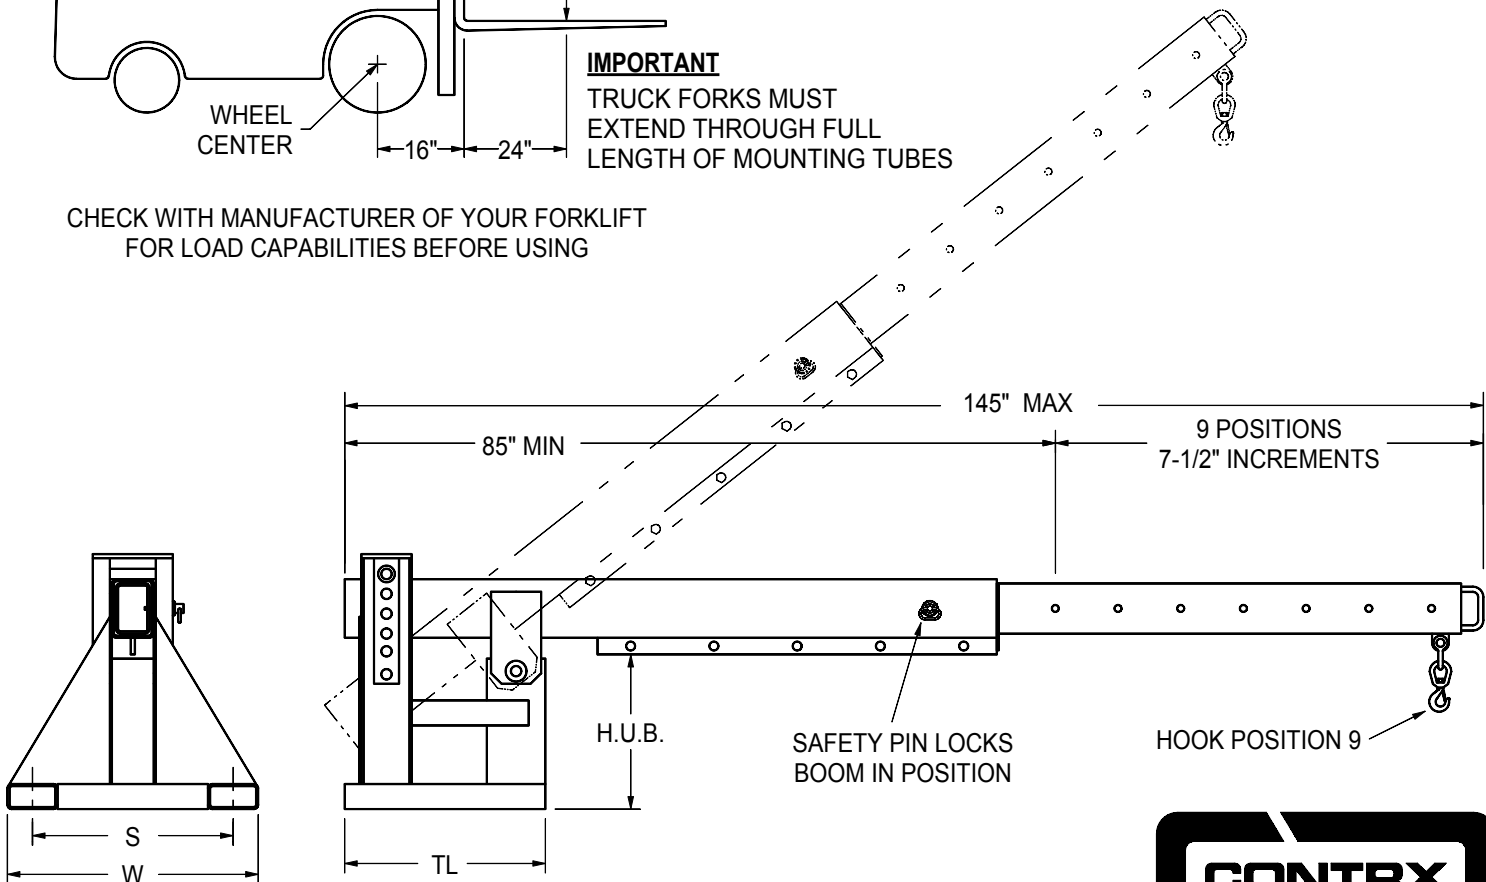

FEATURES

- Handles long loads in closed trucks
- High and long reaches for inaccessible areas
- High underclearances and bulky load handling
- Adjustable at 10° increments from horizontal to 50°
- Safety chain secures jib lift to forklift truck



1377 Kimberly Drive
Neenah, WI 54956-1642
Phone (920) 722-0101
Fax (920) 725-1394

www.contrx.com